


## Vaisala Ozone Interface Kit RSA922

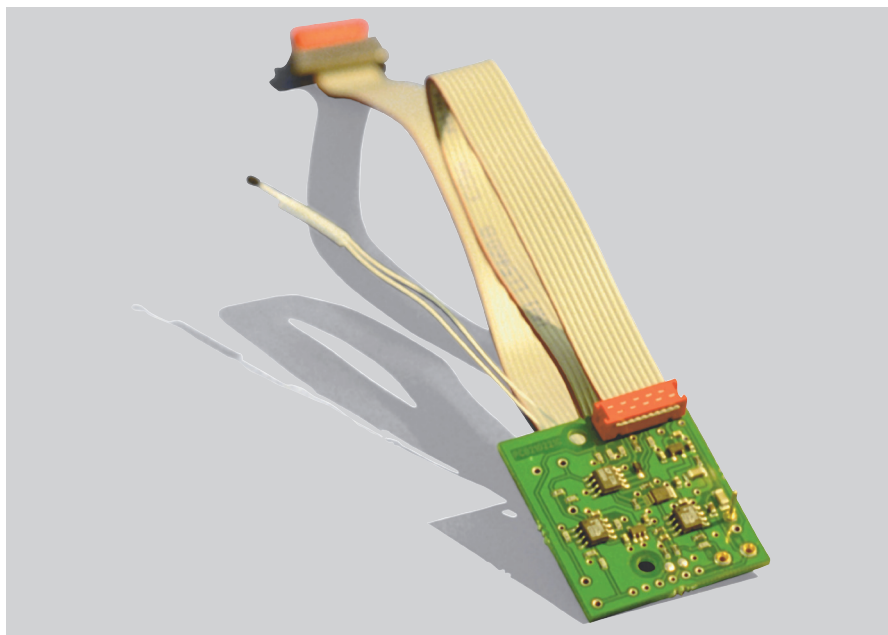

### Features / Benefits

- Built around Vaisala Digital Interface OIF92
- Four-channel digital interface for connecting digital Vaisala Radiosonde RS92 models to Brewer-Mast type ozone sensor for ozone sounding
- Enables accurate measurements, sharp vertical resolution and a fast sampling rate
- Can be used for 1-2 other sensor measurements within specified ranges

The Vaisala Ozone Interface Kit RSA922, featuring the Vaisala Digital Interface OIF92, is used for ozone sounding with the digital versions of the Vaisala Radiosonde RS92 and the MAST corporation 730-10 Brewer-Mast type ozone sensor. The OIF92 is powered by the radiosonde battery and has four channels. Two channels are dedicated to the ozone sensor current and temperature. Two channels are dedicated to voltage measurement for other purposes.

With the OIF92, the Brewer-Mast ozone sensor and a digital RS92 radiosonde it is possible to measure humidity, pressure, temperature and geopotential height while

measuring the vertical distribution of atmospheric ozone. Winds in the upper atmosphere are detected using GPS navigation signals.

### Ground Equipment

The OIF92 and digital RS92 radiosondes are used with the Vaisala DigiCORA® Sounding System MW31. The ozone data is stored to file for further processing by the user. It is easy to perform simulations and post-ascent processing with the METGRAPH module of the DigiCORA® Sounding Software. System maintenance can be performed by Vaisala under the terms of a Vaisala Service Contract.

# Technical Data

## Digital Interface OIF92

For use with	MAST Corporation 730-10 ozone sensor (Brewer-Mast type)
Dimensions	40 (l) x 35 (w) mm
Cable length	380 mm
Weight with cable	Max. 20 g
Number of analog input channels	4
Analog-to-digital converter resolution	16-bit
Measurement temperature range for all channels	-5 ... +60 °C
Operating temperature range for all channels	-40 ... +85 °C
Sampling rate for all channels	Dependent upon the radiosonde: e.g. once per second with the RS92-SGP
Synchronization	All channels are measured in synchronization with the meteorological measurements (pressure, temperature, humidity, wind)
Ozone current measurement range	0 ... 20 µA

## Ozone current measurement uncertainty \*)

	0.05% of the reading, minimum 1 nA
Accuracy examples:	
– for 5 µA measurement	the accuracy is 2.5 nA
– for 10 µA measurement	the accuracy is 5 nA
– for 20 µA measurement	the accuracy is 10 nA
Resolution	1 nA (LSB = 0.35 nA)
Typical noise	1 nA (standard deviation)
Ozone temperature measurement range	-5 ... +60 °C
Temperature measurement uncertainty*)	±0.2 °C
Temperature resolution	0.01 °C
Typical noise	0.015 °C (standard deviation)
Voltage measurement range (both voltage channels)	0 ... 8 V
Voltage measurement uncertainty*)	0.1 % of the reading, minimum 1 mV
Resolution	1 mV (LSB = 0.13 mV)
Typical noise	0.5 mV (standard deviation)
Input resistance	20 kΩ
Driving potential for sensor bias is optional (used for MAST corporation 730-10 ozone sensor)	0.41V (If used, the other voltage channel is reserved for this purpose)
Driving potential adjustment range	±20 %
Driving potential stability	±1 %
Power consumption	< 3 mA (from radiosonde battery)

\*) 2-sigma (k=2) confidence level (95.5%), calculated and based solely on the electrical component uncertainties.

**VAISALA**

[www.vaisala.com](http://www.vaisala.com)

Please contact us at  
[www.vaisala.com/requestinfo](http://www.vaisala.com/requestinfo)



Scan the code for  
more information

Ref. B210437EN-D ©Vaisala 2013  
This material is subject to copyright protection, with all copyrights retained by Vaisala and its individual partners. All rights reserved. Any logos and/or product names are trademarks of Vaisala or its individual partners. The reproduction, transfer, distribution or storage of information contained in this brochure in any form without the prior written consent of Vaisala is strictly prohibited. All specifications — technical included — are subject to change without notice.

