

## Vaisala Barometric Pressure Transfer Standard PTB330TS

### Technical Data

These specifications apply when MI70, PTB330 and HMP155 are used together in the PTB330TS product. For individual specifications, please refer to the product documentation and brochures of the PTB330 and HMP155.

### General

Operating temperature range	-10 ... +40 °C (+14 ... +104 °F)
Operating humidity range	non-condensing
Maximum pressure limit	5000 hPa abs.
Power supply	Rechargeable NiMH battery pack with AC-adaptor or 4xAA-size alkalines, type IEC LR6
Operation time (using rechargeable battery pack)	Continuous use with PTB330 11 h typical at +20 °C (+68 °F)
Datalogging use	up to 30 days
Menu languages	English, Chinese, French, Spanish, German, Russian, Japanese, Swedish, Finnish
Display	LCD with backlight, graphic trend display of any parameter, character height up to 16 mm
Data logging capacity	2700 points
Alarm	audible alarm function

PTB330TS is in conformity with the following EU directives:  
 - EMC Directive (2004/108/EC) Complies with the EMC product family standard EN61326-1, Electrical equipment for measurement control and laboratory use - Basic immunity test requirements.  
 - Low Voltage Directive (2006/95/EC)  
 - ROHS Directive (2002/95/EC)

### Performance

#### Barometric Pressure (PTB330)

Measurement range	500 ... 1100 hPa
Linearity*	±0.05 hPa
Hysteresis*	±0.03 hPa
Repeatability*	±0.03 hPa
Calibration uncertainty**	±0.07 hPa
Accuracy at +20 °C (+68 °F) ***	±0.10 hPa
Temperature dependence****	±0.1 hPa
Total accuracy -40... +60 °C (-40...+140 °F)	±0.15 hPa
Long-term stability	±0.1 hPa/year
Settling time at power-up (one sensor)	4 s
Response time (one sensor)	2 s
Acceleration sensitivity	negligible

\* Defined as ±2 standard deviation limits of endpoint nonlinearity, hysteresis or repeatability error.  
 \*\* Defined as ±2 standard deviation limits of inaccuracy of the working standard including traceability to NIST.  
 \*\*\* Defined as the root sum of the squares (RSS) of endpoint non-linearity, hysteresis error, repeatability error and calibration uncertainty at room temperature.  
 \*\*\*\* Defined as ±2 standard deviation limits of temperature dependence over the operating temperature range.



#### Relative Humidity (HMP155)

Measurement range	0 ... 100 %RH
Accuracy (incl. non-linearity, hysteresis and repeatability) at +15 ... +25 °C (+59 ... +77 °F)	±1 %RH (0 ... 90 %RH) ±1.7 %RH (90 ... 100 %RH)
-10 ... +40 °C (-4 ... 104 °F)	±(1.0 + 0.008 x reading) %RH
Factory calibration uncertainty (+20 °C /+68 °F)	±0.6 %RH (0 ... 40 %RH)* ±1.0 %RH (40 ... 97 %RH)*
Humidity sensor	HUMICAP180R HUMICAP180RC
Response time at +20 °C in still air with a sintered PTFE filter	63 % 20 s 90 % 60 s

\* Defined as ±2 standard deviation limits. Small variations possible, see also calibration certificate.

#### Temperature (HMP155)

Measurement range	-10 ... +40 °C (+14 ... +104 °F)
Accuracy	-10 ... +20 °C ±(0.176 - 0.0028 x temperature) °C +20 ... +40 °C ±(0.07 + 0.0025 x temperature) °C

Accuracy over temperature range (see graph overleaf)

Temperature sensor	Pt100 RTD Class F0.1 IEC 60751
Response time with additional temperature probe in 3 m/s air flow	63 % <20 s 90 % <35 s

# Technical Data

## Available Parameters

Pressure parameters	P, P3h, HCP, QFE, QNH
Humidity and temperature parameters	RH, T, Tdf, Td, x, Tw

## Inputs and Outputs


MI70 probe ports	2
MI70 data interface	RS-232 (accessible only with MI70 Link software)
PTB330 supply voltage	10 ... 35 VDC (if not powered by MI70)
PTB330 data interface	RS-232C
PTB330 serial I/O connectors	RJ45 (service port) Male 8-pin M12 (user port)
HMP155 data interface	RS-485
HMP155 serial I/O connector	Male 8-pin M12

## Mechanics

PTB330	
Housing material	G-AISI 10 Mg (DIN 1725)
Housing classification	IP65
Pressure connector	M5 (10-32) internal thread
Pressure fitting	barbed fitting for 1/8" I.D. tubing or quick connector with shutoff valve for 1/8" hose
HMP155	
Housing material	PC
Housing classification	IP66
Additional T-probe cable length	2 m
Cable material	PUR
Sensor protection	Sintered PTFE
MI70 MEASUREMENT INDICATOR	
Housing classification	IP54
Housing material	ABS/PC blend
TRANSPORT CASE	
Housing classification (when closed)	IP67
Plastic parts	TTX01®, PP+SEBS, POM
Metal parts	stainless steel AISI303
Interior foam material	PE and polyether
Weight with all instruments and typical accessories	5.9 kg
Exterior dimensions (LxWxH)	405x330x165 mm (15.94x12.99x6.50) inch

## Accessories

PTB330	
MI70 – PTB330 Spiral Cable	223235SP
USB-RJ45 serial connection cable	219685
Serial connection cable	19446ZZ
Barbed fitting 1/8"	19498SP
Quick Connector 1/8"	220186
Transport case with interior foams and tabletop casing for PTB330	224068SP
Tabletop casing for PTB330	224064SP
MI70	
USB cable for MI70, includes MI70 Link software	219687
MI70 Link software	MI70LINK
MI70 connection cable to HMT330, MMT330, DMT340, HMT120/130, HMT100, PTB330	211339
MI70 battery pack	26755
variety of AC adapters available	
HMP155	
HMP155 – MI70 connection cable	221801
Protection set for HMP155 calibration buttons: protective cover, 2 O-rings and protective plug	221318
USB cable for HMP155	221040
Sintered teflon filter + O-ring	219452SP
Humidity sensor	HUMICAP180R
Humidity Calibrator	HMK15

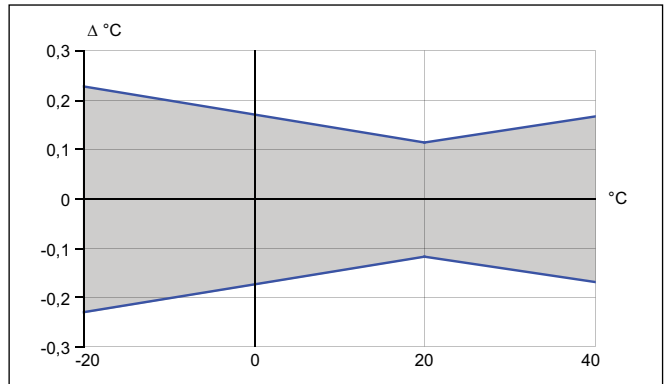

Accuracy of HMP155 temperature measurement over temperature range

**VAISALA**

Please contact us at  
[www.vaisala.com/requestinfo](http://www.vaisala.com/requestinfo)



Scan the code for more information

Ref. B210786EN-B ©Vaisala 2012  
 This material is subject to copyright protection, with all copyrights retained by Vaisala and its individual partners. All rights reserved. Any logos and/or product names are trademarks of Vaisala or its individual partners. The reproduction, transfer, distribution or storage of information contained in this brochure in any form without the prior written consent of Vaisala is strictly prohibited. All specifications — technical included — are subject to change without notice.

[www.vaisala.com](http://www.vaisala.com)

